


>>Datasheet<<


PCM-E352

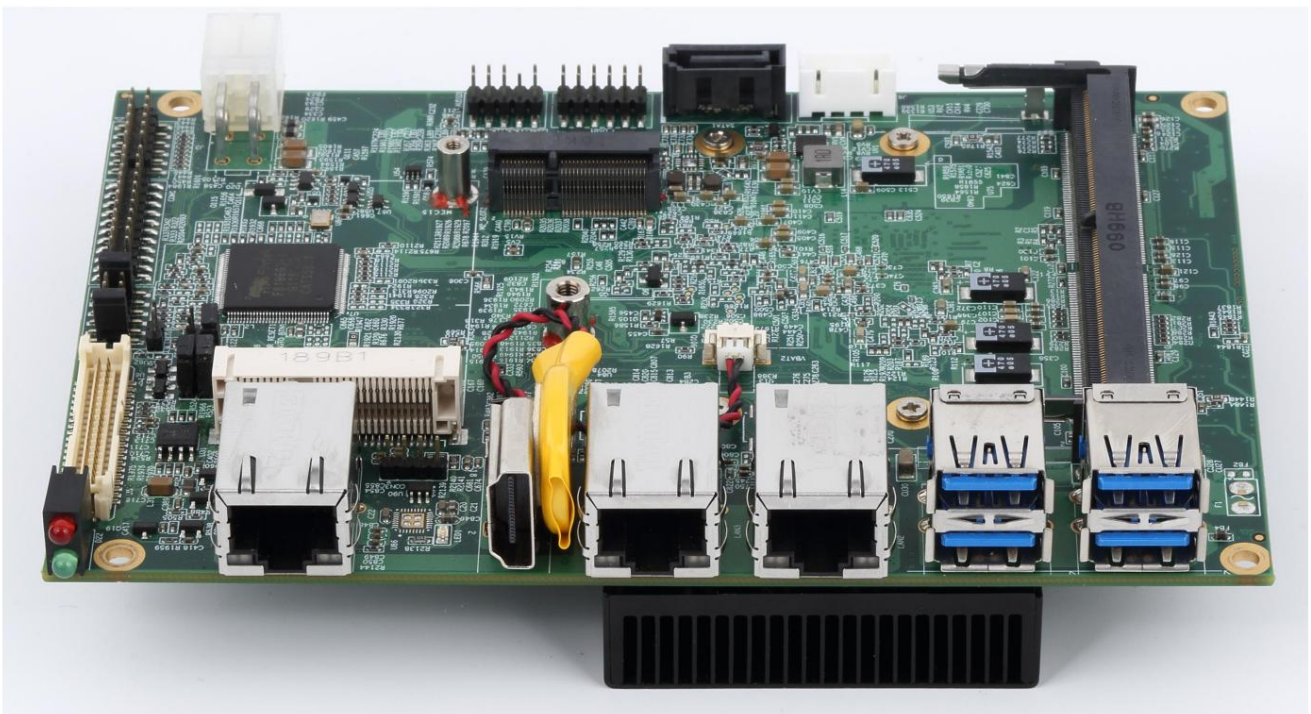

3.5-inch motherboard, onboard Intel® ELKHART LAKE™ series SOC

- » Intel® Elkhart Lake series SOC, power consumption: 4.5-12W
- » SO-DIMM DDR4 memory (voltage 1.2V, supports up to 16G) maximum frequency 3200MHz
- » Intel 11th generation graphics core, supports DX12, MPEG2, H.264, JPEG/MJPEG, H.265 (HEVC)
- » Support eDP 1.3, HDMI2.0, LVDS (18/24-bit single channel or dual channel)
- » Support 10/100/1000Mbit Ethernet, SATA, MSATA
- » USB 2.0 and USB 3.0 interface, RS232/422/485 serial port, GPIO interface
- » Voltage: +12V~+24V, +12V is recommended
- » Operating temperature: -20°C ~ +60°C (optional -40°C ~ +75°C)

PCM-E352 block diagram

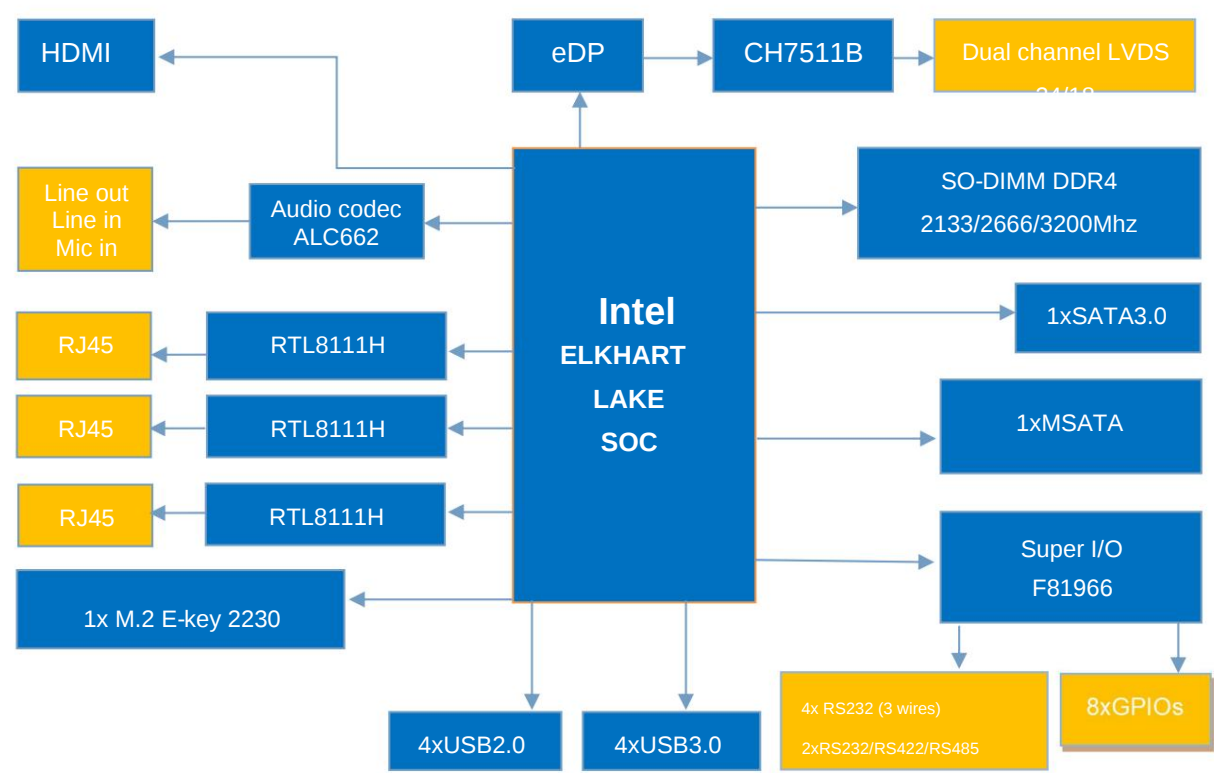

Technical Information	
Plate type	3.5 inch motherboard
processor	Intel[®] Elkhart Lake series SOC, supports: Intel[®] Celeron[®] N6210 dual core 1.2GHz up to 2.6GHz, 6.5W Intel[®] Celeron[®] N6211 dual core 1.2GHz up to 3.0GHz, 6.5W Intel[®] Celeron[®] J6412 Quad core 2.0GHz up to 2.6GHz,10W Intel[®] Celeron[®] J6413 Quad core 1.8GHz up to 3.0GHz,10W Intel[®] Celeron[®] N6415 Quad core 1.2GHz up to 3.0GHz, 6.5W Intel[®] Celeron[®] J6426 Quad core 2.0GHz up to 3.0GHz,10W Intel[®] Atom[®] X6200FE dual core 1.0GHz, 4.5W Intel[®] Atom[®] X6212RE dual core 1.2GHz, 6W Intel[®] Atom[®] X6414RE Quad core 1.5GHz, 9W Intel[®] Atom[®] X6427FE Quad-core 1.9GHz, 12W Intel[®] Atom[®] X6425RE Quad-core 1.9GHz, 12W Intel[®] Atom[®] X6211E dual core 1.3GHz up to 3.0GHz, 6W Intel[®] Atom[®] X6413E Quad core 1.5GHz up to 3.0GHz,9W Intel[®] Atom[®] X6425E Quad core 2.0GHz up to 3.0GHz,12W
Memory	SO-DIMM DDR4 memory (voltage 1.2V, supports up to 16G) maximum frequency 3200MHz
graphics processing	3 independent display outputs support eDP (maximum resolution 2560x1600) or LVDS (maximum resolution 1920x1200) HDMI2.0 (maximum resolution 4096x2160)
network card	Supports 3 RTL8111H 10/100/1000 Mb/s Ethernet
storage	1 MSATA, 1 SATA3.0 1 MPCIE
USB	Support 4 USB2.0 and 4 USB3.0
serial port	Supports 6 RS232 (3 lines), of which COM1 and COM2 are optional RS232/422/485
IO	8 GPIO interfaces
Sound Card	ALC662 high-fidelity sound card (Line-in, Line-out, Mic-in)
Power	+12V~+24V voltage, +12V is recommended
Supply	Operating temperature -20°C to +60°C (optional -40°C ~ +75°C)
Temperature	146 mm x 102 mm
Dimensions	Fan cooling
Heat Dissipation Operating System	Win10, Win11, Linux